

CULTIVATING YOUR FUTURE

DALBO®

MINIMAX GREENLINE


630-830



MADE IN  DENMARK

MINIMAX GREENLINE

3-SECTION 630-830




WORKING WIDTH
6,30-8,30 M



TRANSPORT WIDTH
2,50 M



DIAMETER
61 CM



HORSEPOWER
> 80-100



WEIGHT
2.100-4.860 KG

The MINIMAX GREENLINE roller is an efficient, high-capacity trailed grass rollers. They are specially designed to perform the best possible care and maintenance of grasslands. The GREENLINE roller helps you increase your productivity, your yield, the quality of the field and thus the quality of the feed. This will ultimately mean a better milk quality and thus a higher settlement price.

CONCEPT

Hydraulic folding 3-section roller with horizontal roller sections and low centre of gravity. All operations are controlled from the tractor. By virtue of the big overlap between each section an optimum rolling is achieved across the whole working width - even when turning and on uneven ground. The mechanical weight transfer (2 heavy springs) transfer the weight from the middle section to the side sections achieving an even soil pressure over the complete working width. The DUOFLEX-System ensures that each roller section works independently.

As standard, MINIMAX GREENLINE is prepared for molehill board or cracker board.

STANDARD EQUIPMENT

- » 610 mm drums with smooth rounded ends.
- » DUOFLEX with individual flexibility between sections.
- » Automatic weight distribution with springs that ensure an evenly distributed ground pressure is ensured across the full working width, regardless of the contours of the soil.
- » Strong flange bearings.
- » Detachable support legs.

STEEL DRUM

MINIMAX GREENLINE is equipped with our special steel drum with a diameter of 610 mm, which can be filled with water for increased field pressure. This roller is particularly suitable for working on existing grasslands where efficient


consolidation and stone suppression is desired. The rounded edges that we have are a great advantage when turning on the headland and also in 'normal' work as they do not leave marks or scrapes in the ground.



MOLEHILL BOARD

Mechanically adjustable molehill board, primarily designed to increase roller performance when clearing, rolling and tending grasslands. When using only MINIMAX GREENLINE for rolling, the molehill board can be lifted hydraulically, providing increased


usability and versatility. The molehill board requires an extra double-acting hydraulic service on the tractor. In optimal working conditions we recommend a working speed of 8-10 km per hour.

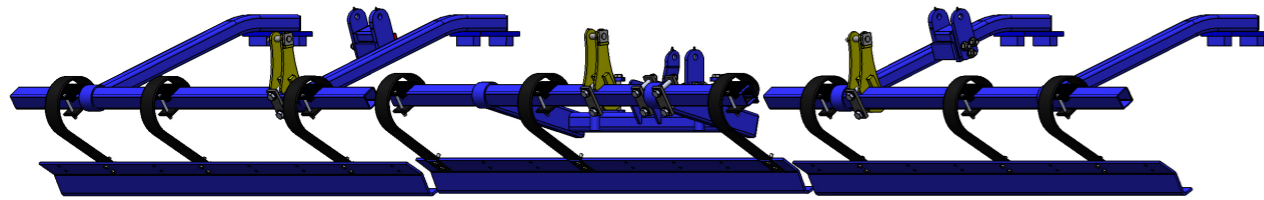

CRACKER BOARD

Hydraulically operated and adjustable cracker board, consisting of strong 80 mm spring tines with 200 x 12 mm angled wearing points. This makes it perfect for crushing clods and levelling the soil, thus leaving the soil loose, smooth and in perfect condition for the roller section. When using only MINIMAX for rolling, the

cracker board can be lifted hydraulically, providing increased usability and versatility. The cracker board requires an extra double-acting hydraulic service on the tractor. In optimal working conditions we recommend a working speed of 8-10 km per hour.

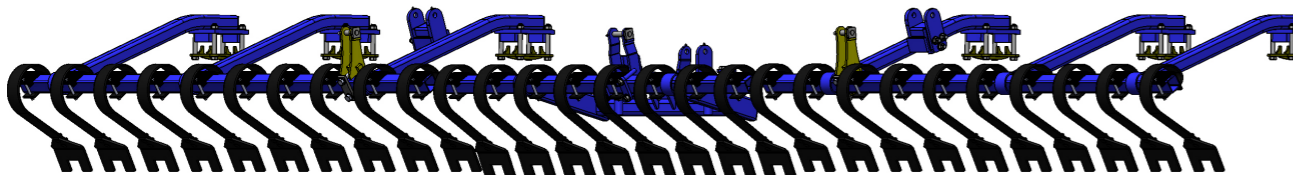

ACCESSORIES AND EXTRA EQUIPMENT

- » Air brakes or hydraulic brakes
- » High pull, fixed eye, drawbar or Scharmüller ball hitch
- » LED road lights
- » Stone trays
- » Hydraulic jack
- » Molehill board or cracker board
- » DALBO seeder 300-500 l

TECHNICAL DATA

TYPE	MINIMAX GREENLINE 630	MINIMAX GREENLINE 830
Transport width	2,50 m	2,50 m
Working width	6,30 m	8,30 m
Weight/with water	2.100/3.900 kg	2.600/4.860 kg
Molehill board	415 kg	480 kg
Cracker board - weight/number of tines	550 kg/22 pcs.	630 kg/28 pcs.
Wheels	400/60x15.5	400/60x15.5
Min. power requirements	80 HP	100 HP
Hydraulic connections	1xDA 1xSA	1xDA 1xSA

DALBO®

Also available from DALBO



MINIMAX 450-950



POWERROLL 1030-1830



FRONT PRESSES 150-600



MAXIROLL 530-1230



MAXIROLL GREENLINE 630-830



MAXICUT 600-920



CULTIMAX 550-1000



ROLLOMAXIMUM 620-1240



CULTITRAIL 500-600



TRIMAX 300-630



POWERCHAIN 500-1200



SUBSOILER M Profi

DALBO A/S, Bindeballevej 69, DK-7183 Randbøl
Tel.: +45 75 88 35 00, info@dalboagro.com, www.dalboagro.com